



CROWN
MACHINERY



Crown Machinery Enterprise Introduction

Crown Machinery Inc. is a modern innovative high-tech centrifuge R&D and manufacture enterprise with four main branches in global work located in USA , South Korea, Philippine and China. Adhering to the concept of quality is the enterprise life, innovation is the driving force for the development, Conform to the trend of the development of modern industry , Fusion concept of global economic integration , Creative thinking , Integrate liquid separation processing industry leading enterprise in the upstream and downstream resources; Gather technical force; Together with the power of the global enterprise for business purposes; Dedicated to supply the clients complete separation solution.






Our company assemble a number of skillful, talented professionals, introduction advanced of international centrifuge technology with 30 years experiences of the development and design, through adopting international advanced management method, we have developed very professional separator and centrifuge for edible oil , pharmaceutical , chemical , waste project and various liquid industry. Until now we have accumulated more than 500 clients in global world market and get wide good feedback for our products and service, as our enterprise name "Crown Machinery" described we would like to supply the products like the crown quality and service.

Nowadays, our USA branch mainly forwards the wastewater market; Manila branch mainly prompts the coconut products machinery in Asia-Pacific market; Our Korean branch also named the Hanil Science Medical Co.,Ltd. is focusing on the Bio-tech and Bio-pharmaceutical market; And Liaoyang Crown Machinery Co.,Ltd. in China works as the head-quarter of four branches to serve the machinery selection, sale, technology support and after-service job.

Up to now, we have successfully introduced many clients' final products such as coconut oil into Chinese market to achieve a mutually beneficial win-win situation. We do hope serving the client not only the products but also the wonderful experience to cooperate with us.

Welcome to contact and visit us.



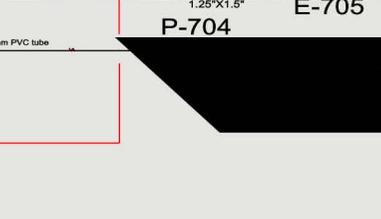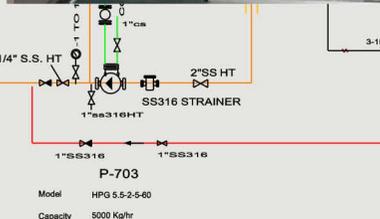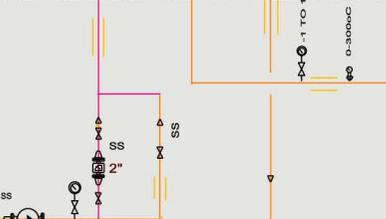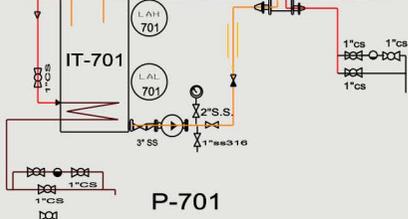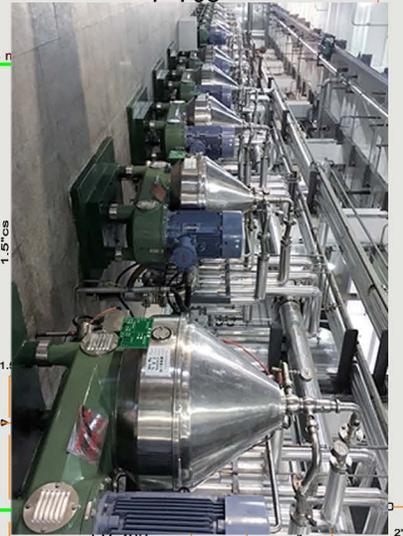


Track Records

P-703
 Model HPG 5.5-2.5-60
 Capacity 5000 Kghr
 5.5 Kw, 380Vx50HZx3px2900rpm
 FLANGE: 1 X DN 50
 1 X DN 32

Model: DL-1P2S
 Flange: DN50 x 4



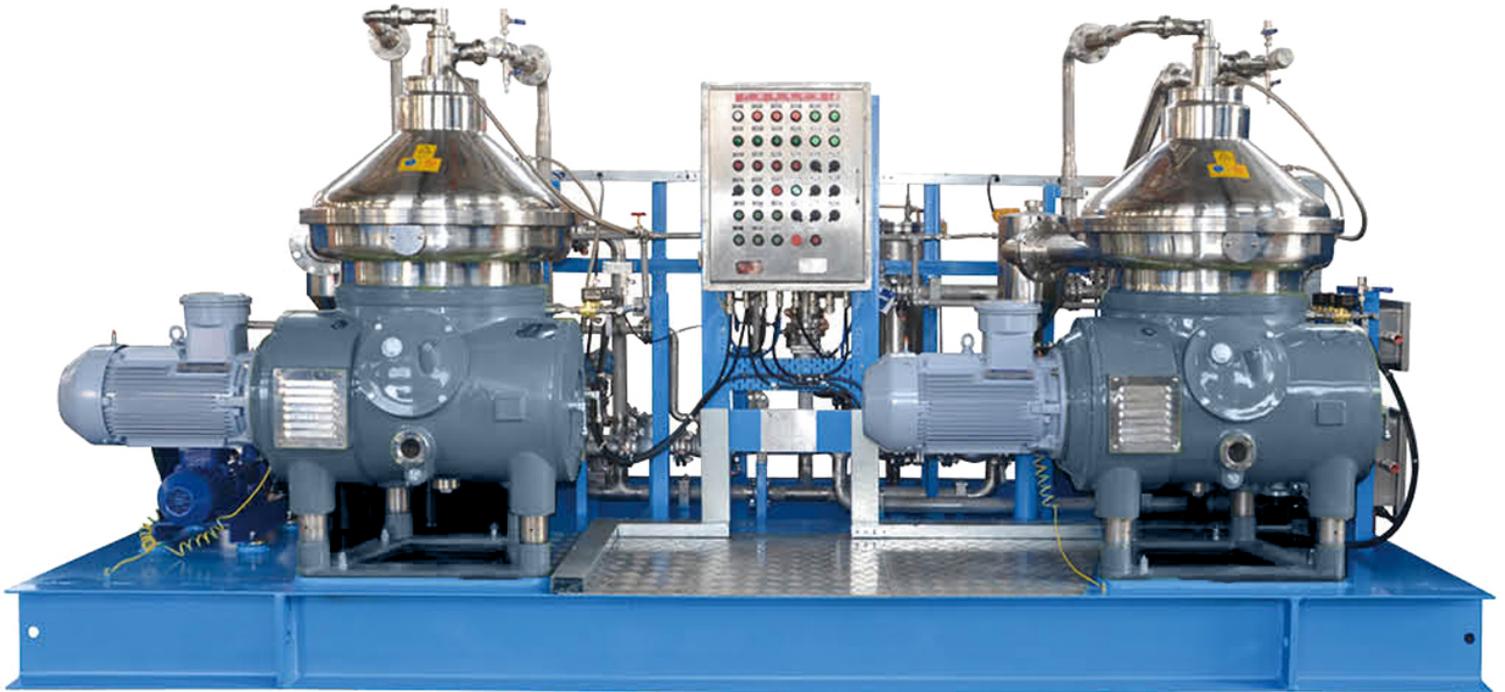

Disc Stack Centrifuge

CHINA

No.13093-06-02 Victory Community
Baita District Liaoyang
China

PHILIPPINES

Suite 310 Intramuros Corporate Plaza
Recoletos St., Intramuros Manila
Philippines

USA

6900 46th Street Kenosha
WI 53144

KOREA

5-4, Songnim-Ro 48beon-Gil
yuseong-Gu, Daejeon
Korea



sales@crown-machinery.com



+86 186 4192 8887



China +86 419 2883215
Philippines +63 2 2549729
USA +1 262 656 7680
Korea +82 42 825 4260



+86 419 2122006

Disc centrifuge is a type of separator that has a series of conical discs which provides a parallel configuration of centrifugation spaces. The disc centrifuge is used to remove solids (usually impurities) from liquids or to separate two liquid phases from each other by means of an enormously high centrifugal force. The denser solids or liquids which are subjected to these forces move outwards towards the rotating bowl wall while the less dense fluids moves towards the centre. The special plates (known as disc stacks) increase the surface settling area which speeds up the separation process. Different stack designs, arrangements and shapes are used for different processes depending on the type of feed present. The concentrated denser solid or liquid is then removed continuously manually or intermittently, depending on the design of the conical plate centrifuge.



TYPICAL APPLICATIONS

BEVERAGE / BREWING INDUSTRY

- Fruit and vegetable juices
- Pectin
- Citrus fruits and tropical fruits
- Essential oils
- Beer
- Wine
- Coffee and tea
- Potable alcohol

CHEMISTRY / BIOTECHNOLOGY



- Process waste water
- Production of vitamins
- Pigments
- Solvents
- Algae (food, cosmetics)
- Fermentation broths (industrial biotechnology)

FATS / OILS / BIOFUELS

- Biodiesel
- Algae (biofuels)
- Fish oil
- Animal fats
- Vegetable oil
- Coconut oil
- Olive oil
- Avocado oil
- Palm oil
- Soybean oil

INDUSTRIAL / MINERAL OILS

- Processing slop oil and oil residues
- Reservoir water

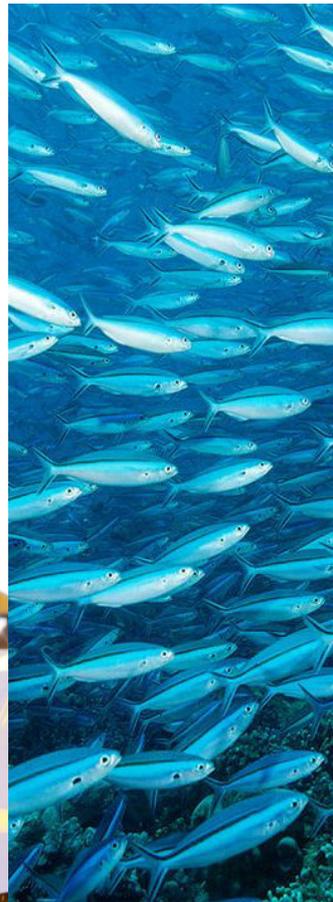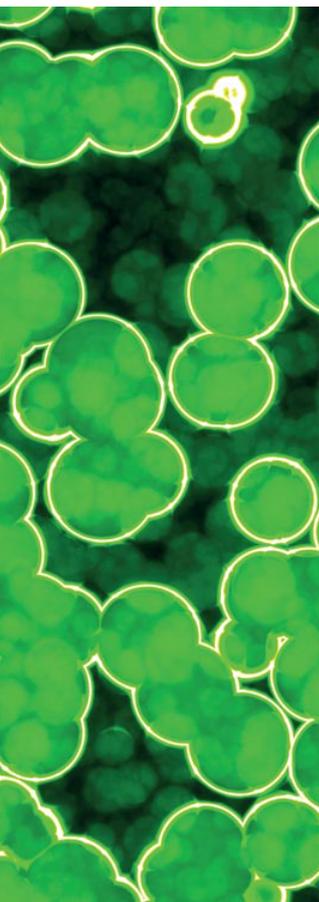



Complete Liquid Solution Provider

The various parameters have a significant influence on separation efficiency. Knowing these parameters means increasing the efficiency and yield of your separation process.

We support our customers along the entire process chain based on our 30 years mature separation experience and technology.

Advantages of Disc Stack Centrifuge:

- Easy maintenance and fair prices for service and maintenance thanks to compact machine design
- Individual and flexible adaptation to customer processes for optimal yields
- Full automatic discharge or manual discharge system can be chose.
- Customized solutions which can easily be integrated into existing processes and systems
- Optimum process layout: selection or combination of different separation equipment: decanters, disc stack centrifuges, belt presses and systems



DGS/DGC-700



DGS-400



DGS/DGC-300



DGS/DGC-500





Centrifuge Machine Standard Design

The machine has a main frame that consist a horizontal drive shaft with clutch and brake, worm gear, lubricating oil bath and vertical bowl spindle in the lower position.

The bowl is mounted on top of the spindle, fixed by the upper parts, the gasket, the collecting parts, and frame hood. The material feed into the bowl, by the effects of centrifugal force the liquid phase pumped out of machine through outlet pipe, meanwhile the solid phase adhere on the bowl wall, then were discharged automatically by operation water. The electric motor is of the variable frequency drive type or of controlled-torque type. All parts in contact with material are made of stainless steel.

Basic Equipment

Concentrator or purifier parts, inlet and outlet devices, revolution counter, set of erosion-protective parts, illuminated sight glass for liquid phase outlet, vibration sensor, vibration-isolating base plate, flange motor, set of tools and set of standard spare parts.

Optional Extras

Electric cabinet, frequency converter, discharge control panel, standard set of fittings, set of CIP valves and fittings and serviceability package for on-line viewing of separator status



Material Data

Bowl body, hood and locking ring S.S304 Solids cover and frame hood S.S304 Frame bottom parts green casting iron Inlet and outlet parts S.S304 Gasket and O-ring Nitrile rubber

Disc Centrifuge Main Parameter

Model	Bowl Speed (rpm)	Through-put Capacity (L/H)	Running Load (kw)	Dimensions (mm)		
				Width	Front-to-Back	Height
300	7302	300-500	4	950	950	1250
400	7070	1000-2000	7.5	1555	1130	1640
480	6600	3000	15	1780	1500	1900
500	6600	5000	18.5	1780	1500	1900
550	6000	10000	22	1800	1850	1900

*Actual production capacity base on the raw materials.






DGS series Disc Centrifuge

Operating principles

Whole separation process of a disc centrifuge accomplished through a rotating bowl, which is mounted on the top of the vertical axis driven by the motor at high-speed rotation. The bowl consist a paring of discs that are nestled together, and a small space between the disc.

Emulsion is added by a inlet pipe located in the center of the bowl. When the emulsion flows through the gap between the discs, the liquid phase of emulsion layered under the centrifugal force and form on the surface of the disc, then light liquid phase flow upward through disc, and heavy liquid phase upward flows close to the wall of bowl, and the separated liquids discharge from the outlet pipe. The solids particles automatically discharge for each batches.

* An emulsion is a mixture of two or more liquids that are immiscible indeed, possible with a certain amount of solid particles

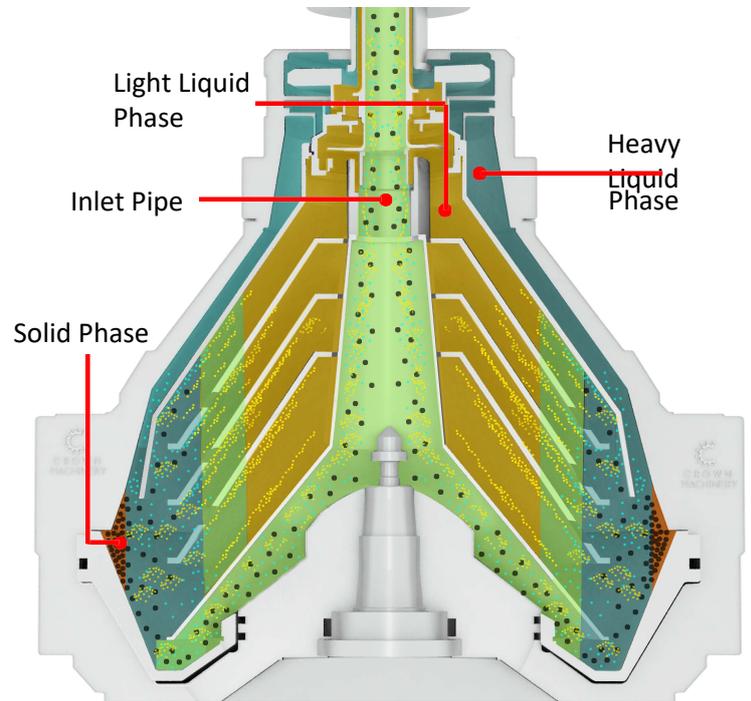


DGC series Disc Centrifuge

Operating principles

Whole separation process of a disc centrifuge accomplished through a rotating bowl, which is mounted on the top of the vertical axis driven by the motor at high-speed rotation. The bowl consist a paring of discs that are nestled together, and a small space between the disc.

Suspension is added by a inlet pipe located in the center of the bowl. When the suspension flows through the gap between the discs, the solid particles settle under the centrifugal force on the disc to form a sediment, then it slides out of the disc surface and accumulates in the largest diameter of the bowl, and the separated liquid discharges from the outlet of bowl. The solids phase will automatically discharged for batches.


* A suspension is a heterogeneous mixture containing solid particles that are sufficiently large for sedimentation.

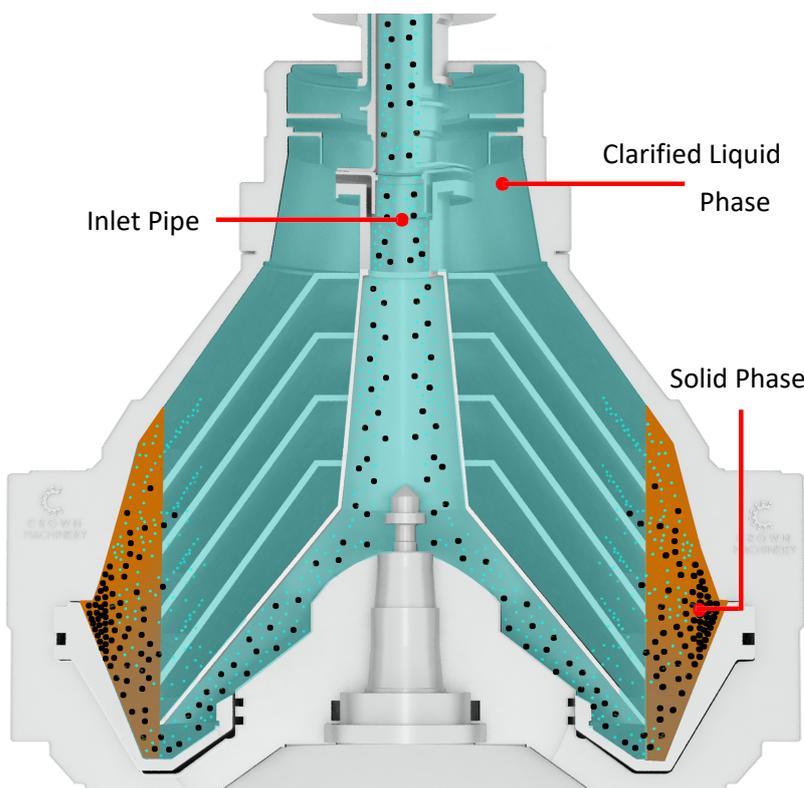




Liquid Feeding/Discharging Configuration

DGC series
One liquid Phase




- Feeding Material
- Liquid Phase
- ⤵ Flow with Pressure

DGS series
Two liquid Phase

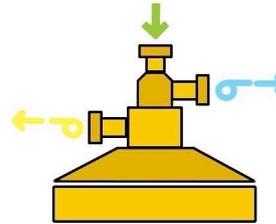

- Feeding Material
- Light Phase
- Heavy Phase
- ⤵ Flow with Pressure
- ⤵ Flow with Pressure

Discharging Method




Manual Discharging

Shut down and open the bowl, manually remove the inside sediment by labor.



Automatic Discharging

Through Intermittent open lower parts of the bowl, sludge discharged automatically.

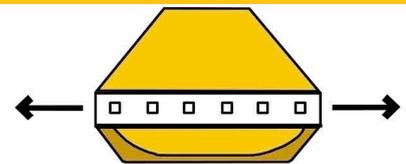

Continuous Discharging


Sludge discharging achieve by the nozzles around the pericline.

Disc Separation



Clarification

Separate the solid particles from the liquid



Separation


Separate a heavy liquid phase from major light liquid phase, meanwhile the suspended solid particles be separated as well. Maximum level of purified the light liquid phase.



Concentration


Separate a light liquid phase from major heavy liquid phase, meanwhile the suspended solid particles be separated as well. Maximum level of purified the heavy liquid phase.

Optional Components and Systems



Electric Cabinet

Monitoring and adjustment of power, parameters setting and safety devices.



Gravity Feeding System

Ensure the material continuous and stable feeding to centrifuge.



CIP Cleaning System

Control the system clean the separation components automatically.



Feeding Pump

Ensure the flow of material to the centrifuge is stable and adjusted automatically.



2 0 1 7 C A T A L O G U E

PHILIPPINES

Suite 310 Intramuros Corporate Plaza, Recoletos St., Intramuros, Manila Philippines

Tel: +63 2 2549729

CHINA

No.13093-06-02 Victory Community, Baita District Liaoyang, China

Tel: +86 419 2883215

KOREA

2FL, Hanil bldg, #527-1 Hagi-Dong, Yuseong-Gu, Daejeon, 305-358, Korea

Tel: +82-42-825-4260

AMERICA

6900 46th Street Kenosha,WI 53144,America

Tel:1-262-656-7680

AUSTRALIA

Boundary Road,Laverton North, VIC, Australia.

TEL:+61 0408 836 697

PAKISTAN

Suite# 311, 3rd Floor, Anum Trade Center, Near Ghani Chowrangj, Site Karachi,Pakistan.

TEL:+021 3257 2200

Iran

No.5, 1st floor, Bldg.32, Shahid Hosseini St., Karimkhan Av., Tehran Iran

Tel: +98-21-88321070/4